

# INSTALLATION INSTRUCTIONS --- Rack Shelves

**Fig. 1**




## 19" RACK SHELF & 25" RACK SHELF – Shelf Installation

These racks are extremely versatile. For instance - we offer 2 different sizes of rack shelves. The 19" SHELF can be installed in any industry standard 19" equipment racks and can be used to hold additional non-rack able components.

The 25" SHELF is unique in that this size was created to accommodate larger than normal non-rack able equipment width and is currently the only one of it's kind. This shelf fits into a RackFrame that uses our package RFB25" depth rail set. Package RFB25" includes (4) 22-3/4" rack rails which allow for the proper opening to install this larger than normal 25" SHELF. Many different configurations are possible; just let your imagination go.

Both of these shelves have 14-1/2" useable depth with cantilever-designed supports. Each shelf requires 2 rack units (3-1/2") of rack space for installation. Each comes complete with 10-32 screws (2 per side), which are used to fasten to the rack rails, see (Fig. 3). These shelves can be installed either as shown in Fig. 1 with cantilever supports above the shelf, or as shown in Fig. 4 with the cantilever supports below the shelf.


**Fig. 2**

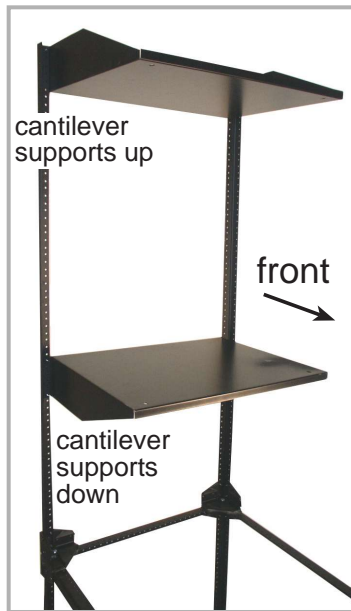

## Computer LAN (Local Area Network) Station - Shelf installation

We offer 2 standard LAN Station configurations, RFLANSTATION20 & RFLANSTATION25. 2 shelves are included in the Extension Rail Package DX of each LAN Station configuration; see (Fig. 2 & Fig. 5). When installing shelves on the LAN Station Extension Rails attach from the rear of the extension rails and with cantilever supports above or below the shelf (see Fig 2 & Fig. 5). (2) 19" shelves are included with the RFLANSTATION20 and (2) 25" shelves are included with the RFLANSTATION25.

**Fig. 3**

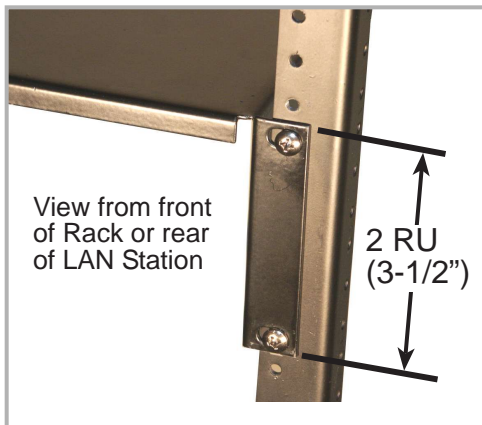

**Fig. 4**



**Fig. 5**

